



# AUTOMATIC WASH DOWN SYSTEM

## WASH DOWN SYSTEM LAYOUT EXAMPLES

### SINGLE CONVEYOR LAYOUT EXAMPLE

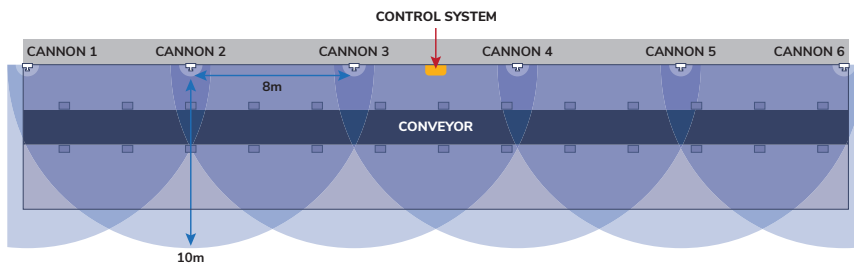

### SCREEN HOUSE AREA LAYOUT EXAMPLE

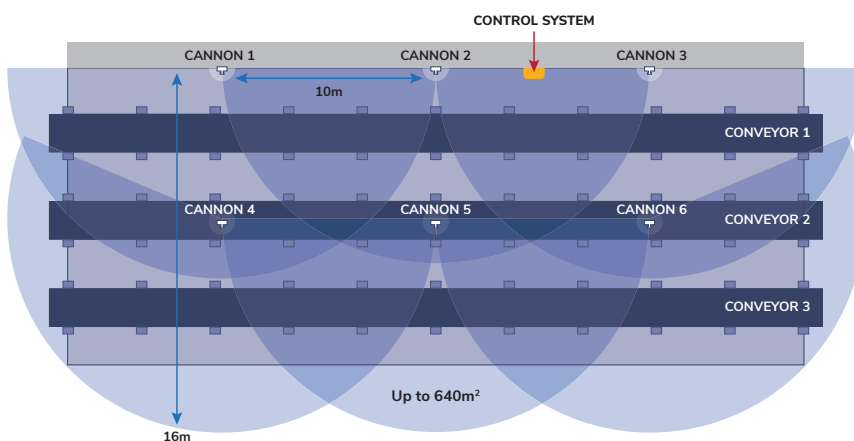

### SYSTEM REQUIREMENTS

- Local Water Supply
- 240VAC Power Supply

### SYSTEM INCLUSIONS

- 240VAC / 24VDC 20Amps power supply with isolation switch
- X-TARGA PLC enclosed in IP66 rated cabinet
- F50-ST Wash Down Cannons
- Customised cannon mounting options
- Customised stainless cannon enclosure

### OPTIONAL

- Touch screen control interface
- Service agreement options
- Lease agreement options

### SYSTEM EXCLUSIONS

- General installation hardware requirements for water and electrical supply

## WASH DOWN SYSTEM INFORMATION

- Each control system can drive 6 cannons
- Each control system requires 240VAC power supply
- Cannons have a maximum cable length of 20m
- Recommended 8m spacings with standard wash down pressure

### ENQUIRY FORM Please complete for an informal quote

#### Site Information

Number of control systems required  Number of cannons required

#### Site Contact Details

Name  Company name   
 Position  Site   
 Phone no.  Email

For more information and other products, please contact us.

