



AUTOMATIC WASH DOWN SYSTEM

WASH DOWN SYSTEM LAYOUT EXAMPLES

SINGLE CONVEYOR LAYOUT EXAMPLE

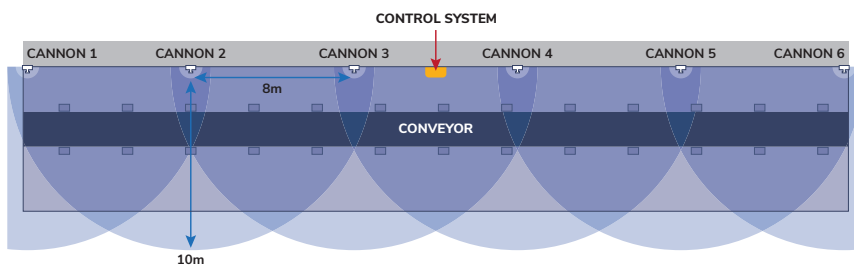

SCREEN HOUSE AREA LAYOUT EXAMPLE

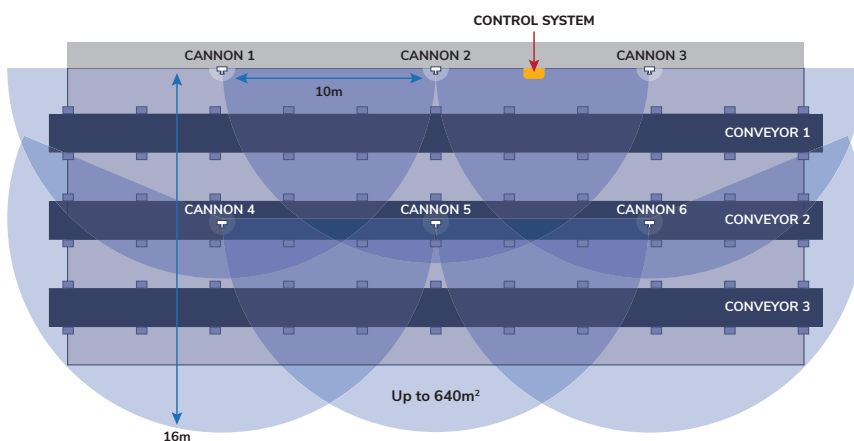

SYSTEM REQUIREMENTS

- Local Water Supply
- 240VAC Power Supply

SYSTEM INCLUSIONS

- 240VAC / 24VDC 20Amps power supply with isolation switch
- X-TARGA PLC enclosed in IP66 rated cabinet
- F50-ST Wash Down Cannons
- Customised cannon mounting options
- Customised stainless cannon enclosure

OPTIONAL

- Touch screen control interface
- Service agreement options
- Lease agreement options

SYSTEM EXCLUSIONS

- General installation hardware requirements for water and electrical supply

WASH DOWN SYSTEM INFORMATION

- Each control system can drive 6 cannons
- Each control system requires 240VAC power supply
- Cannons have a maximum cable length of 20m
- Recommended 8m spacings with standard wash down pressure

ENQUIRY FORM Please complete for an informal quote

Site Information

Number of control systems required Number of cannons required

Site Contact Details

Name Company name
 Position Site
 Phone no. Email

For more information and other products, please contact us.

☎ 13000 MINING (13000 64 64 64)
 ✉ info@innovativemining.com.au
 🌐 www.innovativemining.com.au

